

### REFURBISHMENT SURVEY TO THE EXTERNAL CLADDING ABOVE THE PATIO DOORS AND WINDOWS, THE DAMP PROOF COURSE BELOW AND VOID SPACE BEYOND ONLY

Block A 7-23 Cave Court Wilder Street Bristol BS2 8QX

UPRN: 0336061002P



Issue Date: 31 Jul 2025

#### LiveWest

1 Wellington Way Skypark Exeter EX5 2FZ

Email: asbestos.surveys@livewest.co.uk

Tel: 0300 123 8080

### **Contents:**



### Contents

- 1. Executive Summary [Conclusions and actions]
- 2. Contract Review
- 3. Introduction Purpose, Aims and Objectives
- 4. Desk Top Review and Survey Planning
- 5. Survey Method
- 6. Exclusions and Caveats
- 7. Sampling and Analysis
- 8. Survey Results Interpretation
- 9. Recommendations

## **APPENDICES - Survey Results**

Appendix 1 - Asbestos Register - Results

Appendix 2 - Survey Data Sheets

Appendix 3 - Areas Surveyed

Appendix 4 - Analysis Certificates

Appendix 5 - Plans

Page 2 of 27 J046197

### 1.0 Executive summary:



Asbestos containing materials have been identified during the Refurbishment Survey and the specific areas are categorized below in order according to the initial Material Risk Assessment made by LiveWest.

HIGH RISK MATERIALS - Material Score 10 and above or Priority Score of 18-24

Issue Date: 31 Jul 2025

Asbestos in poor condition, or asbestos debris/contamination has been identified within the following areas listed in the table below. It is recommended that risk assessment (s) are undertaken to ensure that Regulation 4, Regulation 10, Regulation 11, and Regulation 16 of the Control of Asbestos Regulations 2012 are complied with.

Building	Floor	Room	Item	Material	Risk assessment Score	Recommendations			
There were no results found.									

MEDIUM RISK MATERIALS - Material Score Between 7 and 9 or Priority Score of 12-17

Asbestos containing materials, which are unsealed or damaged, have been identified within the following areas listed in the table below. It is recommended that remedial work to seal or remove these materials is undertaken as a priority and that air monitoring is carried out within adjacent areas in order to assess airborne fibre levels.

Building	Floor	Room	Item	Material	Risk assessment Score	Recommendations			
There were no results found.									

Page 3 of 27 J046197

## 1.0 Executive summary:



LOW RISK MATERIALS - Material Score 6 and below or Priority Score of less than 11

Issue Date: 31 Jul 2025

Asbestos Containing Materials have been identified which are in good condition, A management policy and plan need to be implemented to manage these materials safely. The materials require labelling and the condition of these materials re-inspected at 24 monthly intervals.

Building	Floor	Room	Item	Material	Risk assessment Score	Recommendations			
There were no results found.									

Page 4 of 27 J046197

## 1.0 Executive summary:



#### PRESUMED ASBESTOS/NO ACCESS AREA

Asbestos Containing Materials have been presumed as being present to the following areas where access could not be gained. A management policy and plan needs to identify that these areas require inspection once access can be provided. These areas require re-inspection for accessibility at 24 monthly intervals.

Building	Floor	Room/Area	Recommendation		
There were no results found.					

### **Building Notes:**

Internal notes: N/A External notes: N/A

Page 5 of 27 J046197

# 2.0 Contract Review:



Name and address of site:	Block A 7-23 Cave Court Wil	Block A 7-23 Cave Court Wilder Street Bristol							
Name and address of client:	LiveWest North PIMSS, 1 We	LiveWest North PIMSS, 1 Wellington Way, Skypark, Clyst Honiton, Exeter							
Client contact:	Alan Townend	Alan Townend							
Type of survey:	Refurbishment Survey (with I	Refurbishment Survey (with MA + PA)							
Date of survey:	22 Jul 2025	22 Jul 2025							
Report Revision Number:	1								
TEAMS internal job number:	J046197								
Lead surveyor[s]:	Anthony Osborne	Anthony Osborne Signature:							
Technically reviewed by:	Anthony Osborne Signature:								
Report issue date:	31 Jul 2025	1	1						

Page 6 of 27 J046197

### 3.0 Introduction/Objectives:



LiveWest received an order of confirmation to undertake a Refurbishment Survey from LiveWest North PIMSS. This order has been accepted on the basis of the original quotation and our terms and conditions of business.

The order relates to a Refurbishment survey of:

Block A 7-23 Cave Court Wilder Street Bristol BS2 8QX

The survey was carried out by Anthony Osborne.

The Type of survey selected / requested by the client was a Refurbishment survey.

Issue Date: 31 Jul 2025

The reason for selecting this survey is to enable the client to identify asbestos in his premises so that it can be removed prior to major refurbishment.

The survey has included the completion of priority assessment in accordance with HSG227. This priority assessment was completed with input from the duty holder and his representatives.

This survey was carried out in accordance with documented in house procedures, which are based on the HSE Guidance document HSG 264.

#### 3.1 Purpose of Survey

The purpose of this Major refurbishment Survey is to help the duty holder identify asbestos in these premises, prior to. It provides sufficient information to help the tendering process for removal works prior to any work starting. However it is strongly recommended that any asbestos removal should be undertaken against a detailed specification. We further recommend the appointed removal contractor should attend the site to confirm for themselves the quantities and location of asbestos to be removed, prior to costing.

#### 3.2 Aim of Survey

The aim of the survey was to;

- 1. Locate and record the location, extent, and product type as far as reasonably practicable of known or presumed ACM's.
- 2. Inspect and record information on the accessibility, condition and surface treatment of know or presumed ACM's
- 3. Determine and record the asbestos type based on sampling or by making a presumption based on product type and appearance
- 4. Locate all ACM's within the fabric of the building prior to refurbishment.

Page 7 of 27 J046197

# 3.0 Introduction/Objectives(Cont):

Issue Date: 31 Jul 2025



## - Type of Survey

#### 3.3 Type of Survey – Refurbishment Survey

The purpose of this major refurbishment survey is to identify ACM's to be removed prior to any major refurbishment work being carried out. This type of survey is used to locate and describe as far as is reasonably practicable all ACM's in the whole building if major refurbishment is planned.

Major refurbishment surveys are intended to locate all asbestos within the building. It is a disruptive, fully intrusive survey that involves destructive inspection techniques that penetrate the building structure extensively. This involves breaking into floors, through walls, into wall voids ceilings, cladding, boxing, as necessary to gain access to all areas, including the inner fabric of the building. A full sampling programme is undertaken to identify possible ACM's and estimate their quantities.

The survey is designed to be used to help the tendering process, and should be used to start generating a specification for tendering the removal of ACM's from the building prior to major refurbishment.

Whilst all asbestos materials have been identified as far as is reasonably practicable, some asbestos materials may remain unidentified buried within the fabric of the building during the survey. Asbestos shuttering buried within concrete slabs, asbestos hidden by structural supports, asbestos hidden behind other asbestos products, and building structures which are unsafe to fully access are potential locations.

It must be presumed that asbestos may remain unidentified to these type of areas and if suspect materials are uncovered during major refurbishment then samples should be taken for analysis.

Page 8 of 27 J046197

## 4.0 Desk Top Review and Survey Planning:

Issue Date: 31 Jul 2025



Details of information requested from the Duty Holder by LiveWest in order to carry out a desk top review and plan the survey in accordance with HSG 264 were recorded on our pre-survey questionnaire, along with details of all the information that were provided by Alan Townend on behalf of the client.

The Information provided was assessed during the desktop review and a survey plan, and risk assessment was produced for the survey of:

Block A 7-23 Cave Court Wilder Street Bristol BS2 8QX

**Building Designation:** Main Block

Building Description: Three storey purpose built residential block

Age of Building: Late Twentieth Century

Construction Type: Traditional brick work construction with pitched tiled roof

The Refurbishment Survey was carried out to the external cladding above the patio door/windows, the damp proof course below and void space between only.

The following areas were excluded from the Refurbishment Survey: All other areas to the block

Where information was provided regarding the presence of known or presumed asbestos materials then this has been validated during the course of the survey, and recorded within this report.

Detailed drawings were not provided by the client at the time of the survey.

A decontamination unit was not needed onsite during the survey.

Utilities and services were still live at the time of the survey.

Access equipment for working at heights was not required.

The survey did not involve confined space working.

The client did not inform LiveWest of any chemical/biological hazards.

An appropriate exchange of information has occured between Alan Townend of the LiveWest asbestos surveying department and LiveWest to enable survey planning in accordance with 'HSG264 Asbestos: The Survey Guide'.

This survey has been undertaken by Livewest's in-house asbestos surveying team and is intended for internal contractors on Livewest stock, third parties should check the contents of this report, and if necessary, seek additional clarification or obtain supplemental information if any doubt exits relating to the presence of asbestos containing materials present in the location of the intended works prior to these works proceeding.

Page 9 of 27

J046197

## 5.0 Survey Method



- **<u>5.1</u>** This survey has been undertaken in accordance with HSG264 and LiveWest in house procedures.
- <u>5.2</u> Clients of LiveWest that have signed our terms and conditions are deemed to have agreed, and accepted, our surveying approach, our sampling strategy, and our standard planning, surveying and reporting format unless they have made specific requests to the contrary.
- <u>5.3</u> The information provided by the client or their representative are recorded in the planning document and has been used to define the scope of the survey.

Issued By: Anthony Osborne

- <u>5.4</u> Photographs of suspected ACM's will be taken at the time of the survey unless the client expressly requests otherwise. Sampling points and suspected ACM's will not be identified with labels unless the client expressly requests otherwise.
- <u>5.5</u> All fibrous materials and item will be included in the survey unless, in the surveyors professional opinion, these items can be excluded (eg. Wood, wallpaper, man-made mineral fibre). Samples of all thermoplastic floor coverings will be taken unless, in the surveyors professional opinion, such items can be excluded. All textured coatings and novel bituminous will be sampled.
- <u>5.6</u> Areas that could not be accessed were presumed to have ACM's present until proven otherwise. Each area requiring further inspection is documented within the Executive summary (Inaccessible areas). Inaccessible areas are also shown on the plan drawings (Appendix 5)
- <u>5.7</u> Materials that could not be accessed and in the surveyors opinion can be dismissed will be presumed to be ACM unless proven otherwise. Materials that are not sampled but, in the surveyors opinion, have a similar appearance, location and function as a previously sampled material will be strongly presumed to be similar to the sampled material.
- <u>5.8</u> The quantity of samples taken may have been minimised by using 'strongly presumed' as defined above. Materials that are 'strongly presumed' to be similar to a material that has already been sampled will be recorded in the comments section of the survey and referenced against the original sampled material.
- 5.9 Our surveyor has made every attempt to avoid causing damage during the management surveys whilst attempting to identify possible ACM's. Minor repairs will be made and any areas accessed will be left in a safe condition.
- 5.10 Intrusive damage that is required to gain access to an area/location that is within the scope of the survey has been agreed with the client or the clients representative. Any remedial action will be put in place before such action is attempted. If remedial action cannot be arranged, no attempt to access the area will be made and the reasons recorded. The area/locationwill be presumed to have ACM's present until proven otherwise.
- <u>5.11</u> Non fibrous materials and item known not to contain asbestos (eg Breeze block, plaster, plasterboard plastics and non textured paints) will be excluded from the survey unless the surveyor suspects that these materials have been contaminated with asbestos from other sources or specifically requested by the client.
- <u>5.12</u> Older electrical equipment, which cannot be shown to contain ACM's, has been presumed to have ACM's present unless, in the surveyors professional opinion, such items can be excluded.

Page 10 of 27 J046197



**6.1** For safety reasons it is not possible to inspect internal areas of plant and machinery.

Issue Date: 31 Jul 2025

Access to internal wall linings and general cavities was restricted to avoid excessive damage to surface finishes.

Where areas have been designated as 'no access' or 'restricted access', unless further inspection/sampling proves otherwise, the presumption has been made that these structures/areas contain asbestos materials.

During the course of the survey it may not have been possible to access all areas of the site. Details of areas requiring further access are identified within the Data Sheets of this report. In accordance with HSG 264, asbestos is presumed to be present within these areas and should be treated accordingly until further inspection and analysis of building fabric and services proves otherwise.

It is recommended that further intrusive inspection and sampling be carried out where site refurbishment, maintenance, or similar may disturb Asbestos Containing Materials that have remained inaccessible during this survey, this should be a refurbishment/demolition survey as described in HSG 264.

Residual asbestos material may be present beneath re-lagged services and cannot be detected unless the re-lagging is systematically removed. Caution should therefore be taken when working on such materials for the potential presence of asbestos residue.

Textured Coatings such as "Artex" may contain a trace quantity of Chrysotile asbestos. Due to this low asbestos content, applications of this product may be non-homogenous and may elicit both positive and negative samples. Where both positive and negative samples are obtained the client should presume that the textured coating contains Chrysotile throughout even though a non-detected result has been obtained.

This report does not include investigations into land contamination associated with asbestos or any other contaminant.

#### 6.2 Specific caveats

It was agreed with the client that access above or behind known ACM's was not required within the survey.

It was agreed with the client that core boring into the concrete slabs was not required within the survey.

LiveWest North PIMSS has requested a less intrusive survey to existing doors and windows with no intrusive inspection to be carried out to, or within the immediate area of, these features.

Underground services were not included in the survey.

It has been agreed with LiveWest North PIMSS that there was not any unsafe structures on site.

Page 11 of 27 J046197

### 7.0 Sampling and Analysis:



7.1 The object of bulk sampling is to identify the nature and extent of any visible ACM.

Issue Date: 31 Jul 2025

- 7.2 Bulk sampling is undertaken inline with the recognised safe procedures in order to cause minimal possible nuisance and potential risk to health of the building occupants and visitors. Bulk samples are taken in accordance with documented in house procedures, following guidelines detailed in HSG264 'The Survey Guide' and HSG248 'The Analyst Guide'. The quantity of samples taken will be minimised by using 'strongly presumed'. Materials that are 'strongly presumed 'to be similar to a material that has already been sampled will be recorded in the comments section of the survey record and referenced against the original sampled material.
- 7.3 Bulk samples are returned to the appointed bulk analysis laboratory with the appropriate sample / report reference number. Where appropriate; a label will be left on site adjacent to the sample location.
- 7.4 The label will indicate the sample number and the date taken. This label can be used along with the report for cross reference purposes.
- <u>7.5</u> Bulk sample analysis is carried out in accordance with HSE document HSG 248 'The Analysts Guide' and LiveWest documented in-house methods. Samples are examined under a low magnification stereomicroscope and the fibres teased apart. The fibres are then mounted in liquids of known refractive indices and examined under high magnification using polarised light and dispersion staining in accordance with HSG 248 'The Analysts Guide'.
- **7.6** The bulk sample description and analysis results can be found in Appendix 4 of this report The analysis certificate.

Key to Analysis Results:

Chrysotile - White Asbestos

Amosite - Brown Asbestos

Crocidolite - Blue Asbestos

Tremolite - Rare Asbestos

Actinolite - Rare Asbestos

Anthophyllite - Rare Asbestos

Page 12 of 27 J046197

#### Issue Date: 31 Jul 2025

## 8.0 Survey Results - Interpretation:



### Survey Results

<u>8.1</u> The results of the survey inspections and sampling undertaken are recorded on the enclosed Survey Data Sheets (appendix 2), Asbestos Register (appendix 1) and Non-Asbestos Material Register (appendix 3). Where asbestos containing material have been identified or presumed to be present then a Material Assessment Algorithm has been calculated as detailed in HSG 264 and reproduced in the table below:

**8.2** Within the survey data sheets the individual scores in brackets, for each sample variable, are added together to form the final material/priority risk assessment algorithm score.

Page 13 of 27 J046197

## 8.0 Survey Results - Interpretation (cont):

Issue Date: 31 Jul 2025



### **Material Risk Assessment Algorithm**

Product type [or debris from product]

Score	Examples of scores
1	Asbestos reinforced composites [plastics, resins, mastics, roofing felts, vinyl floor tiles, semi- rigid paint, decorative finishes and asbestos cement etc]
2	Asbestos insulating board, mill boards, other low-density boards, textiles, gaskets, ropes and woven materials and asbestos paper.
3	Thermal insulation [e.g. pipe and boiler lagging], sprayed asbestos, loose asbestos, asbestos mattresses and packing.

Extent of damage/deterioration

Score	Examples of scores
0	Good condition: no visible damage
1	Low damage: a few scratches or surface marks, broken edges on boards or tiles, etc.
2	Moderate damage: significant breakage of materials or several small areas where material has been damaged exposing fibrous edges.
3	High damage or deterioration of materials, sprays and thermal insulation. Visible asbestos contamination by debris or residues.

#### **Surface treatment**

Score	Examples of scores						
0	Composite materials containing asbestos, reinforced plastics, resins, vinyl tiles						
1	inclosed sprays or insulation, AIB [with exposed face encapsulated], cement sheets, etc.						
2	Unsealed AIB, encapsulated insulation and sprays.						
3	Unsealed insulation and sprays.						

#### **Asbestos Type**

Score	Examples of scores
1	Chrysotile
2	Amphibole asbestos (excluding Crocidolite)
3	Crocidolite

Page 14 of 27 J046197

### **Priority Risk Assessment Algorithm**

Issue Date: 31 Jul 2025

Ass	sessment Factor	Score	Examples of score variables
Normal occupant activity	Main type of activity in area	0	Rare disturbance activity (e.g. little used store room)
		1	Low disturbance activities (e.g. office type activity)
		2	Periodic disturbance (e.g. industrial or vehicular activity which may contact ACMs)
		3	High levels of disturbance, (e.g. fire door with asbestos insulating board sheet in constant use)
	Secondary activities for area	As above	As above
Likelihood of disturbance	Location	0	Outdoors
		1	Large rooms or well ventilated areas
		2	Rooms up to 100m2
		3	Confined spaces
	Accessibility	0	Usually inaccessible or unlikely to be disturbed
		1	Occasionally likely to be disturbed
		2	Easily disturbed
		3	Routinely disturbed
	Extent/amount	0	Small amounts or items (e.g. strings, gaskets)
		1	≤10m2 or ≤10m pipe run
		2	>10m2 to ≤50m2 or >10m to ≤50m pipe run
		3	>50m2 or >50m pipe run
Human exposure potential	Number of occupants	0	None
		1	1 to 3
		2	4 to 10
		3	>10
	Frequency of use of area	0	Infrequent
		1	Monthly
		2	Weekly
		3	Daily
	Average time area is in use	0	<1 hour
		1	>1 to <3 hours
		2	>3 to <6 hours
		3	>6 hours
Maintenance activity	Type of maintenance activity	0	Minor disturbance (e.g. possibility of contact when gaining access)
		1	Low disturbance (e.g. changing light bulbs in asbestos insulating board ceiling)
		2	Medium disturbance (e.g. lifting one or two asbestos insulating board ceiling tiles to access a valve)
		3	High disturbance (e.g. removing a number of asbestos insulating board ceiling tiles to replace a valve or
			for re-cabling)
	Frequency of maintenance activity	0	ACM unlikely to be disturbed for maintenance
		1	≤1 per year
		2	>1 per year
		3	>1 per month

Page 15 of 27 J046197

Issue Date: 31 Jul 2025

Issued By: Anthony Osborne

### **Material Risk Assessment Score**



Risk Category	Risk	Score Range	Fibre release potential		
А	HIGH	Material Score 10 and above or Priority Score of 18-24	High risk with a high potential to release fibres if disturbed		
В	MEDIUM	Material Score Between 7 and 9 or Priority Score of 12-17	Medium risk with a medium potential to release fibres if disturbed		
С	LOW	Material Score Between 5 and 6 or Priority score of 9-11	Low risk with and having low potential to release fibres if disturbed  Very low risk with and having very low potential to release fibres if disturbed		
D	VERY LOW	Material Score 4 and below or Priority Score of less than 8			

Page 16 of 27 J046197

### 9.0 Recommendations:



9.1 To comply with and ensure that the requirements of section 2 & 3 of the Health and Safety at Work Act (as amended) 1974, the Management of Health and Safety at Work Regulations 1999, the Control of Asbestos Regulations 2012 and the Control of Substances Hazardous to Health 2002 are met, the following recommendations should be implemented:

Issued By: Anthony Osborne

- 9.2 Undertake suitable and sufficient Risk Assessments of identified asbestos containing materials against normal occupation and maintenance operations, in compliance with Regulations 3 of the Management of Health & Safety at Work Regulations 1999 and Regulation 6 of the Control of Asbestos Regulations 2012.
- 9.3 The findings of the survey be brought to the attention of those persons who are likely to come in contact with asbestos, in compliance with Section 2 and 3 of the Health and Safety at Work Act (as amended) 1974 and Regulation 10 of the Control of Asbestos Regulations 2012.
- 9.4 Implement an Asbestos Management Policy, Plan and review process in compliance Regulation 4 of the Control of Asbestos Regulations 2012.
- 9.5 Instigate regular inspections, to record and update details of retained asbestos containing materials.
- 9.6 Review the arrangement under the management plan in accordance with regulation 4of the CAR 2012.
- 9.7 During the course of the survey it may not have been possible to access all areas of the site. Details of areas requiring further access are identified within the Data Sheets of this report. In accordance with HSG 264, asbestos has been presumed to be present within these areas and should be treated accordingly until further inspection and analysis of building fabric and services proves otherwise.
- 9.8 Where asbestos debris or asbestos in poor condition has been found it is recommended that access is restricted and or controlled to these areas in accordance with Regulation 11 and Regulation 16 of the Control of Asbestos Regulations 2012.
- 9.9 If we have identified asbestos materials in poor condition, it is recommended that air monitoring is carried out within a number of areas where asbestos materials have been identified in order to assess airborne fibre levels within adjacent occupied areas in relation to the clearance indicator, as documented by HSG 248 the Analyst Guide.
- 9.10 All identified asbestos to be appropriately identified and subject to risk assessment, management, and re-inspection.
- 9.11 Site specific recommendations in respect to the location and condition of asbestos materials identified during the course of this inspection are detailed in the Survey Data Sheets and Asbestos register. In considering the management of asbestos materials identified to date, these recommendations should be taken into consideration.
- 9.12 In accordance with the Control of Asbestos Regulations 2012 the removal of ACM's fall into one of the three categories below:

#### Licensed Asbestos Removal

Is defined as any work, which is undertaken on a friable asbestos product or which is likely to exceed the control limit of 0.1f/cm3. A licensed asbestos removal contractor must undertake this work and a 14-day notice must be given to the HSE prior to the commencement of the work.

#### Notifiable Non Licensed Works

If work on an ACM causes the deterioration of the matrix material in which the asbestos fibres are firmly linked, then these works are Notifiable Non Licensed Work (NNLW). Work of this type does not require an asbestos removal licence, but the company undertaking the work must have the following:

- -Notification of the work to the relevant enforcing authority prior to the work commencing.
- -Medical examinations to assess each worker's state of health to be carried out, before any possible exposure to asbestos. Then re-examinations every three years.
- -Insurance for working with asbestos containing materials.
- -A register of work to be kept by the employer for each employee exposed to asbestos.

#### Non Notifiable Non Licensed work

- -Non-Licensed Works Is defined as any work, which involves short, non-continuous maintenance activities, during which only nonfriable materials are removed. It can also involve the removal of non-friable materials for refurbishment purposes. However, work of this type is only applicable where the matrix material in which the asbestos fibres are firmly linked remains intact.
- -If a non-licensed contractor is appointed to undertake the removal works on the above materials, the following points must be adhered to:
- -All operatives undertaking work on the material must have asbestos awareness training and practical asbestos training.
- 9.13 It is recommended that further intrusive investigations and sampling be carried out in accordance with HSG.264, where any major refurbishment, maintenance, installation or similar activity may expose asbestos materials that have remained inaccessible during the survey. This should be as a refurbishment/demolition survey as documented in HSG264.
- 9.14 The findings of this report should not be solely relied upon in obtaining costs for proposed asbestos abatement work. Any proposed abatement/removal of the asbestos should be undertaken against a detailed specification.

Page 17 of 27 J046197

# Appendix 1 - Asbestos Register

Issue Date: 31 Jul 2025



Building	Floor	Location /Room	S,P,SP,AS Sample No	Product Type	Condition	Surface Treatment	Asbestos Type	Quantity	Accessibility	Material Score	Priority Score	Total PA risk assessment score	Recommendation
There were no results found.													

#### KEY:

S – Sampled, P – Presumed, SP – Strongly Presumed, AS – Cross reference to former sample

Page 18 of 27 J046197

# Appendix 2 – Survey Data Sheets



Service Type	Refurbishment Survey	Refurbishment Survey				
Report Revision Number	1	Surveyors	Anthony Osborne			
TEAMS Job Number	J046197	Survey Date	22 Jul 2025			
Site Address:	Block A 7-23 Cave Court Wilder Street	Bulk Analysis Laboratory	Envirochem			
	Bristol BS2 8QX	Sample Analysis Date	30 Jul 2025			

Page 19 of 27 J046197

### LiveWest



Survey Date:	Lead Surveyor	Survey Type	Floor	Analysis
22 Jul 2025	Anthony Osborne	Refurbishment/Demolition Survey	External	No Asbestos Detected
Building	Room	Item	Quantity	
Main Block	EXTERNAL MISC E01	Bitumen felt LINING	12m²	
Sample No (S,SP,P,As)	Product Type	Surface Treatment	Condition	Accessibility
GU000233 (S)	N/A	N/A	N/A	N/A

Normal Occupancy	Score	Likelihood of disturbance	Score	Exposure Potential	Score	<b>Maintenance Activity</b>	Score	
Main type of activity	N/A	Location	N/A	Number of occupants	N/A	Type of Maintenance	N/A	
		Accessibility	N/A	Frequency of use	N/A	Frequency of maintenance	N/A	
		Amount	N/A	Average Time	N/A			
Average Score	N/A	Average Score	N/A	Average Score	N/A	Average Score	N/A	
Average of Priority	N/A							
Material Assessment Score	N/A							
Recommendation	No further action required							
Surveyor comments	Bitumen felt lining in front of non suspect foam beyond timber cladding. AO 22.07.25							

#### KEY:

 $S-Sampled,\ P-Presumed,\ SP-Strongly\ Presumed,\ AS-Cross\ reference\ to\ former\ sample$ 

Issue Date: 31 Jul 2025

Page 20 of 27 J046197

#### Survey Data Sheets (cont)





Survey Date:	Lead Surveyor	Survey Type	Floor	Analysis
22 Jul 2025	Anthony Osborne	Refurbishment/Demolition Survey	External	No Asbestos Detected
Building	Room	Item	Quantity	
Main Block	EXTERNAL MISC E01	Bitumen damp proof course DAMP PROOF COURSE	>200m²	
Sample No (S,SP,P,As)	Product Type	Surface Treatment	Condition	Accessibility
GU000234 (S)	N/A	N/A	N/A	N/A

Normal Occupancy	Score	Likelihood of disturbance	Score	Exposure Potential	Score	Maintenance Activity	Score		
Main type of activity	N/A	Location	N/A	Number of occupants	N/A	Type of Maintenance	N/A		
		Accessibility	N/A	Frequency of use	N/A	Frequency of maintenance	N/A		
		Amount	N/A	Average Time	N/A				
Average Score	N/A	Average Score	N/A	Average Score	N/A	Average Score	N/A		
Average of Priority	N/A								
Material Assessment Score	N/A								
Recommendation	No further action required								
Surveyor comments	Bitumen damp proof course covering footprint of block. AO 22.07.25								

#### KEY:

S – Sampled, P – Presumed, SP – Strongly Presumed, AS – Cross reference to former sample

Issue Date: 31 Jul 2025

Page 21 of 27 J046197

#### Survey Data Sheets (cont)





Survey Date:	Lead Surveyor	Survey Type	Floor	Analysis	
22 Jul 2025	Anthony Osborne	refurbishment/Demolition External N		N/A	
Building	Room	Item	Quantity		
Main Block	EXTERNAL MISC E01	Visually no suspect materials identified ALL OTHER ELEMENTS	N/A		
Sample No (S,SP,P,As)	Product Type	Surface Treatment	Condition	Accessibility	
Visual (P)	N/A	N/A	N/A	N/A	

Normal Occupancy	Score	Likelihood of disturbance	Score	Exposure Potential	Score	Maintenance Activity	Score		
Main type of activity	N/A	Location	N/A	Number of occupants	N/A	Type of Maintenance	N/A		
		Accessibility	N/A	Frequency of use	N/A	Frequency of maintenance	N/A		
		Amount	N/A	Average Time	N/A				
Average Score	N/A	Average Score	N/A	Average Score	N/A	Average Score	N/A		
Average of Priority	N/A								
Material Assessment Score	N/A								
Recommendation	No further action required								
Surveyor comments	Brick walls with timber doors and frames to front with metal grills to first and second floors, timber cladding below second and first floor with non suspect foam blocks in void onto internal walls and timber batons with sampled felt lining. AO 22.07.25								

#### KEY:

 $S-Sampled,\,P-Presumed,\,SP-Strongly\,Presumed,\,AS-Cross\,reference\,to\,former\,sample$ 

Issue Date: 31 Jul 2025

Page 22 of 27 J046197

Issued By: Anthony Osborne

# Appendix 3 - Areas Surveyed

Issue Date: 31 Jul 2025



Building	Floor	Room No:	Room Type	Item
Main Block	External	E01	MISC	Brick walls with timber doors and frames to front with metal grills to first and second floors, timber cladding below second and first floor with non suspect foam blocks in void onto internal walls and timber batons with sampled felt lining. AO 22.07.25

Page 23 of 27 J046197

# Appendix 4 – Sample Certificates



Page 24 of 27 J046197



Our Ref: J325670 FI: 2 Your Ref: J046197 Date: 30/07/2025



### **Asbestos Fibre Identification Report**

Client: LiveWest Homes Ltd

1 Wellington Way, Skypark Business Park, Clyst Honiton, Exeter, EX5 2FZ

Site Address: Block A 7-23 Cave Court Wilder Street Bristol, BS2 8QX

Sampled By: LiveWest Homes Ltd

Date sampled/received:28th July 2025Date analysed:30th July 2025Analyst/s:Sam Barton

**Analysis Location:** 12 The Gardens, Broadcut, Fareham, Hampshire, PO16 8SS

#### ANALYTICAL PROCEDURE

Fibre identification was carried out in accordance with the documented `in-house' method (2.01) based on the HSE Guidance Note HSG 248. These employed stereo microscopy, polarized microscopy and dispersion staining techniques.

#### **RESULTS**

Sample No.	Sample Ref.	Location	Asbestos Detected	Asbestos Type
GU000233	BS1073491	External, EXTERNAL MISC, Bitumen felt	No	
GU000234	BS1073492	External, EXTERNAL MISC, Bitumen damp proof course	No	

#### NOTES

- 1. Sample(s) were examined for the presence of 6 types of asbestos fibres: crocidolite (blue), amosite (brown), chrysotile (white), anthophyllite, actinolite and tremolite.
- 2. The results shown in this test report refer to the sample(s) tested as received unless otherwise stated and samples collected by the client are evaluated using the information provided by the client (clients details, site address, sampled by and location), Environment disclaims responsibility for its accuracy and validity. For sample(s) collected by the client the date of receipt is deemed as date sampled.

PRINT NAME: Ella Hiron

3. Envirochem is a UKAS accredited testing laboratory No. 1227 for sampling and identification of asbestos containing materials 4. Comments, observations and opinions are outside the scope of UKAS accreditation.

5. The analytical method in the HSG248 does not quantify the amount of asbestos present, therefore UKAS accreditation does not permit quantification.

Authorised signatory

6. If, during fibre identification, only 1 or 2 fibres are seen and identified as asbestos, then the term 'trace asbestos identified' is used.

7. This report shall not be reproduced except in full, without written approval of Envirochem.

8. Samples are retained for 6 months, report kept for 5 years from the date of authorisation of this report

Page 1 of 1

SIGNATURE: Ellahian

envirochem analytical laboratories limited

12-14 The Gardens, Broadcut, Fareham PO16 8SS t: +44(0)1329 287777 | www.envirochem.co.uk | Reg. No. 2378228










DATE AUTHORISED: 30/07/2025

# Appendix 5 – Plans

Issue Date: 31 Jul 2025



Page 26 of 27 J046197

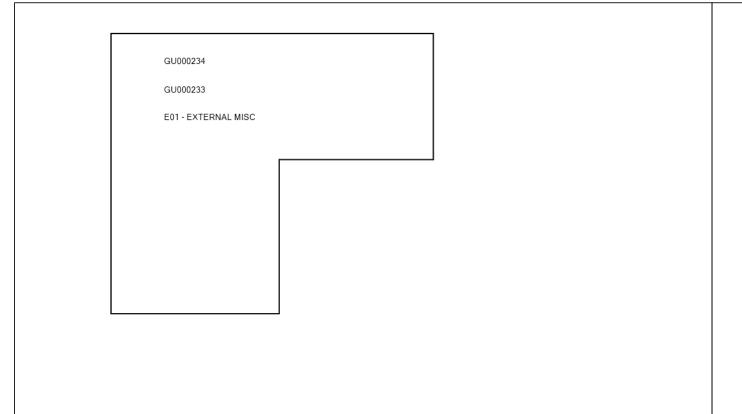

Issue Date: 31 Jul 2025

Plan Key:



Positive or Strongly Presumed Asbestos in area / room



No Access within or to area / room

Client: LiveWest North PIMSS

Site: Block A 7-23 Cave Court Wilder Street Bristol

Floor: External

UPRN No: 0336061002P

Building: Main Block

